


Notes

1. Finish:
Case, black powder coat
Front plate, black anodised.
2. Supply 0V and signal return are internally connected to the module case.
3. Module power input typically 5V, 12mA, with no light input 5V, 36mA, at max. count rate
4. Standard module has TTL output via divide-by-2 prescaler. A no prescaler version, DM00xxC1, is available as factory preset option.

Sales Drawing

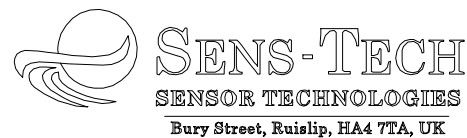

Issue	Date	C/Note No.	Sign
6	22.01.04		
7	22.03.04		
8	05.03.09	S00189	
9	07.01.10	S00258	AS

Material
Finish
Surface finish Unless otherwise specified

Drawn by M. Stoodley
Date 2 December 1997
Scale 1:1
Checked M. Stoodley
Approved R. Ellis
Sheet size A3 F/DO007 issue 1

Project	DM0016C
Title	Photodetector module
Drawing Number	25894 C 703
Sheet 1 of 1	

Confidentiality Notice . This document (including all information contained therein) is owned by Sens-Tech Limited and must be kept in confidence and used solely for the owner's specified purposes. This document must not be copied or reproduced, nor divulged, in whole or part, without the owner's prior written consent.

THIRD ANGLE PROJECTION